


Exploded view of AIOS 353CV 81 x 133 mm

Updated 23.02.2021

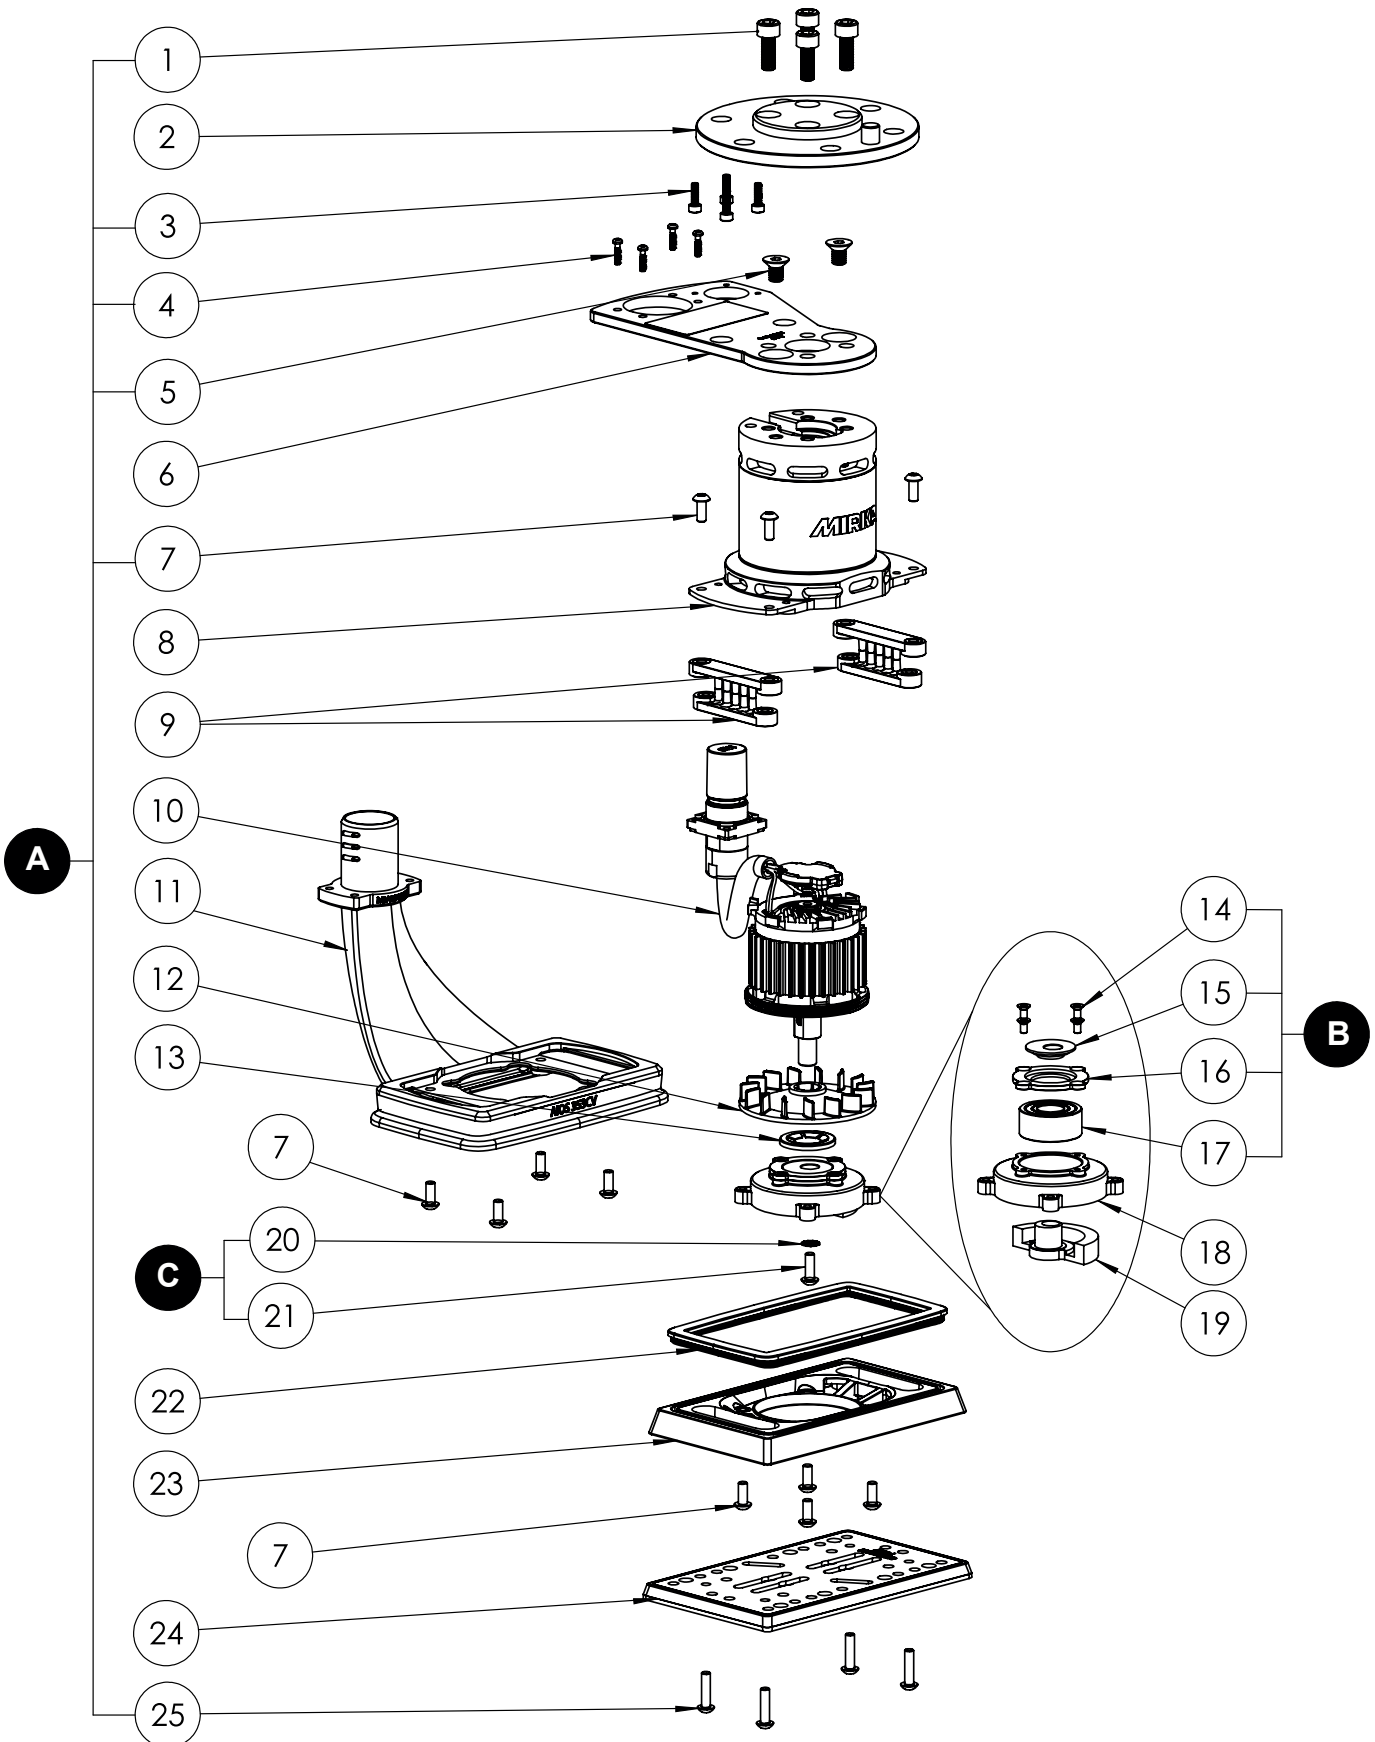

## AIOS 353CV 81 x 133 mm Spare Part kits (48V)

Electrical tool must be serviced by a qualified repair person and in accordance with national requirements.

**Note!** Repairs done by non-authorized repairer will breach the Mirka warranty.

Mirka Code	Item	Description	Kit	Qty	Tightening Torque
<b>MIA6520211</b>		<b>Screw kit</b>			
	1	Screw M6x16		4	10 Nm
	3	Screw M3x10		4	1,5 Nm
	4	Screw STS T25x10	A	4	
	5	Screw M6x10		2	8 Nm
	7	Screw M4x10 mm		12	2,4 Nm
	25	Screw M4x16 mm		4	2,4 Nm
<b>MIE3321811</b>		<b>Bearing kit</b>			
	14	Screws		4	1 Nm
	15	Dust Shield	B	1	
	16	Bearing Flange		1	
	17	Ball Bearing		1	
<b>MIE3322411</b>		<b>Balancing Housing Screw kit</b>			
	20	Washer	C	1	
	21	Screw M4x12 mm		1	

## AIOS 353CV 81 x 133 mm Spare Part (48V)

Mirka Code	Item	Description	Kit	Qty	Tightening Torque
	1	Screw M6x16	A	4	10 Nm
<b>MIA6510111</b>	2	<b>Flange ISO 9409-1-80-6-M8</b>		1	
	3	Screw M3x10	A	4	1,5 Nm
	4	Screw STS T25x10	A	4	
	5	Screw M6x10	A	2	8 Nm
<b>MIA6510511</b>	6	<b>Connector Plate</b>		1	
	7	Screw M4 x 10mm	A	12	2,4 Nm
<b>MIA3510511</b>	8	<b>Housing *</b>		1	
<b>MIE3311711</b>	9	<b>Pad Support 2/Pack</b>		2	
<b>MIA3521011</b>	10	<b>Motor *</b>		1	
<b>MIA3510411</b>	11	<b>Exhaust</b>		1	
<b>MIE3311511</b>	12	<b>Fan</b>		1	
<b>MIE3361611</b>	13	<b>Pushlock Washer</b>		1	
	14	Screws	B	4	1 Nm
	15	Dust Shield	B	1	
	16	Bearing Flange	B	1	
	17	Ball Bearing	B	1	
<b>MIE3312211</b>	18	<b>Bearing Housing</b>		1	
<b>MIE3512311</b>	19	<b>Balancing Weight 81x133 mm</b>		1	
	20	Washer	C	1	
	21	Screw M4x12 mm	C	1	2,4 Nm
<b>MIE3312511</b>	22	<b>Seal</b>		1	
<b>MIE3512611</b>	23	<b>Backing plate 81x133mm</b>		1	
<b>8292353011</b>	24	<b>Backing Pad Net 81x133mm Grip 46H Medium</b>		1	
	25	Screw M4x16 mm	A	4	2,4 Nm

\* Spare parts only available to authorized repairers.